


**Keltron TA Series
 Modular LED Annunciators**

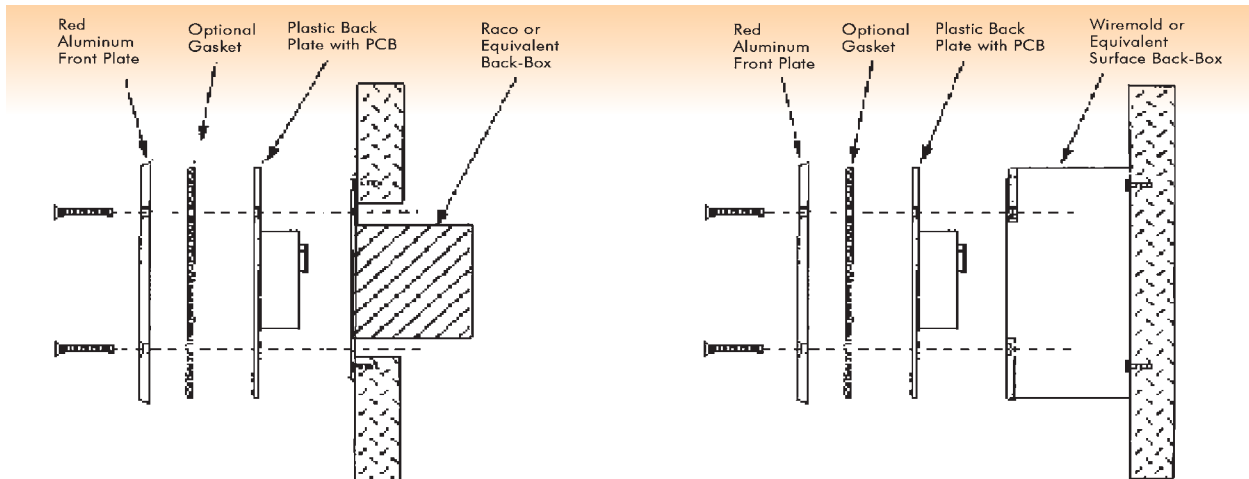

Caution: Only models TA05, TA10, TA15, TA20 and TA25 should be used for exterior applications.

Installation

The annunciator mounts to a standard gangable switch box with a depth of at least 2 inches. The screws required to mount the units are included. The plastic legend strips should be typed prior to installation.

Make all wiring connections to the unit before mounting the unit to the switch box.

Match the terminal numbers on the annunciator with the terminal numbers on the installation diagram.

The red face plate and the plastic back plate are mounted as one piece. If the unit is an exterior model, the gasket is mounted between the red face plate and the plastic back plate.

Wire Size

The terminal strips on the TA annunciator will accept wires from 12 to 22 AWG.

Testing

Once the unit has been installed, it should be tested in accordance with the control panel test specifications to verify that all zone indicators and options are operating properly.

Switch Box Requirements		
Model	Flush ¹	Surface ²
05	1	5744-1
05A	2	5744-2
10	2	5744-2
10A	3	5744-3
15	3	5744-3
15A	4	5744-4
20	4	5744-4
20A	5	5744-5
25	5	5744-5
25A	6	5744-6
30	6	5744-6
¹ Number of Raco™ 519 or equivalent gangable boxes ² Wiremold™ or equivalent		

Keltron develops and manufactures universally-compatible, UL listed life safety event management systems for the municipal and proprietary markets. Solutions include Ethernet signaling systems, active network radio systems, distributed multiplex systems, digital communicator/receiver systems, and direct wire systems. This document is not intended for installation or maintenance purposes. All specifications are subject to changes without notice. For more information visit www.keltroncorp.com or contact us at 781-894-8710.

© 2008 Keltron Corporation. All rights reserved.