


## Keltron 10R7211 Stealth Antenna for RF750 Subscriber Units

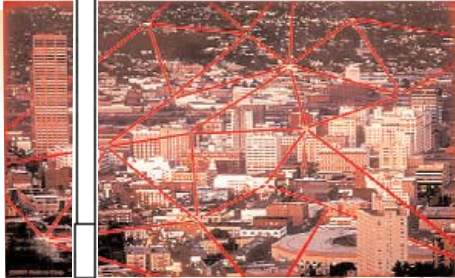

Low visibility

Easy installation

High performance

### Ideal for:

- Low visibility installations
- Roof rafters
- Closet walls
- Dropped ceilings
- Inside plastic vent pipes
- Basement joists
- Build into wall of new or remodeled construction
- Drop into wall for "no antenna" installations
- Portable or temporary systems
- Surface mounts almost anywhere

### Technical Specifications

- UHF frequency ranges available:
  - 460-470 MHz
  - 450-460 MHz
- Antenna length: approximately 18 inches
- Coaxial lead: 10 feet
- Connector: BNC male
- Gain: approximately 3 db
- Polarization: vertical
- Maximum power: 50 W intermittent duty
- Standing wave ratio (SWR): less than 1.8
- For indoor use
- Vinyl clad
- Bandwidth  $\pm 5$  MHz
- Vertical beam width 35°
- Omnidirectional

Anywhere you need an easy-to-install high performance antenna

*To improve product performance and reliability, Keltron reserves the right to change specifications without notice.*

Keltron develops and manufactures universally-compatible, UL listed life safety event management systems for the municipal and proprietary markets. Solutions include Ethernet signaling systems, active network radio systems, distributed multiplex systems, digital communicator/receiver systems, and direct wire systems. This document is not intended for installation or maintenance purposes. All specifications are subject to changes without notice. For more information visit [www.keltroncorp.com](http://www.keltroncorp.com) or contact us at 781-894-8710.

© 2008 Keltron Corporation. All rights reserved.